


JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER
----------	---------	------	------	-------

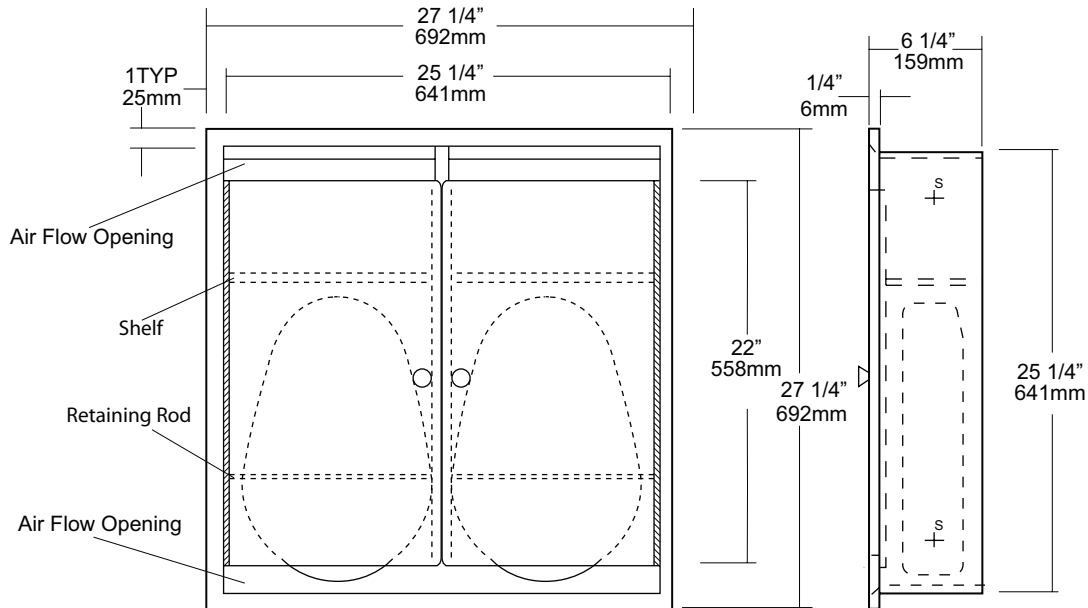

SPECIFICATIONS

- Body:** Fabricated of #22 ga stainless steel. 2 1/2" space above and below door allows for air circulation.
- Flange:** Fabricated of #22 ga stainless steel with #4 satin finish and 1/4" returns to wall, no miters or welds.
- Cabinet Back:** Fabricated of stainless steel formed for rigidity with multiple welds to cabinet body.
- Cabinet Doors:** Fabricated of #22 ga stainless steel with #4 satin finish secured by means of magnetic catches with door knob or easy opening.
- Lower Shelf:** Lower shelf is #22 ga stainless steel finished to match body with front edge rolled to prevent injury.
- Upper Shelf:** Stainless steel shelf welded in place for storage.
- Retaining Rod:** Stainless steel rod across the width of the cabinet prevents bed pan from falling out when doors are opened.
- Hinges:** Heavy duty, full length, stainless steel piano type hinge.
- Collars:** Fabricated of #22 ga #4 satin finish stainless steel finished to match cabinet body.
- Overall Size:** 27 1/4"W x 27 1/4"H x 6 1/4"D
692mm x 692mm x 159mm
- Wall Opening:** 25 3/4"W x 25 3/4"H x 6"D
654mm x 654mm x 159mm
- U952-S2:** 2" semi-recessed with 4 1/4" wall opening
- U952-S4:** 4" semi-recessed with 2 1/4" wall opening
- U952-SM:** Fully surface mounted

INSTALLATION

Coordinate installation with contractor and architect to avoid interference with pipes vents etc. Provide a rough wall opening 25 3/4"W x 25 3/4"H. Wall opening depth will depend on style mounting. If a collar is required, slip over back of unit. Open door & install unit in opening. Make sure cabinet will sit flush in wall and secure with proper fasteners per application.

NOTES