
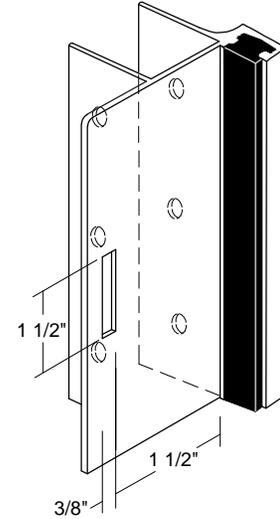
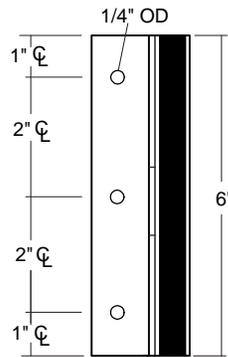





# Aluminum Strike & Keepers

## Inswing & Outswing


### Inswing

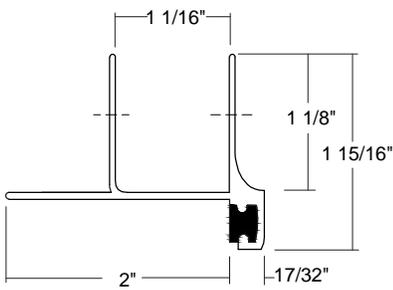

### Outswing

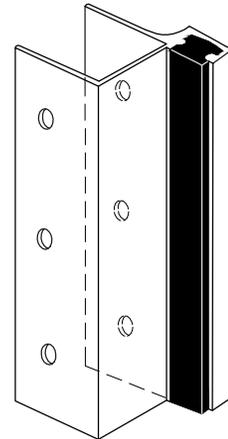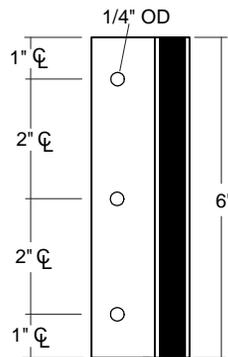

### Sample Elevation

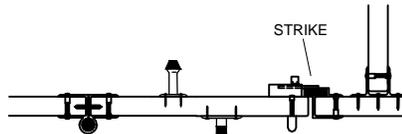

- **Material:** 1/8" Thick, Clear Anodized Aluminum; Black Rubber.
- **Application:** Allows door to be secured with slide latch.
- **Fasteners required per component:** (3) male/female thru-bolt pairs.