

## U6474/199AW


### ROLL TOWEL DISPENSER & WASTE RECEPTACLE

Job #:

Item #:

Quantity:

MOUNTING	HANDING	TYPE	SIZE	OTHER
----------	---------	------	------	-------

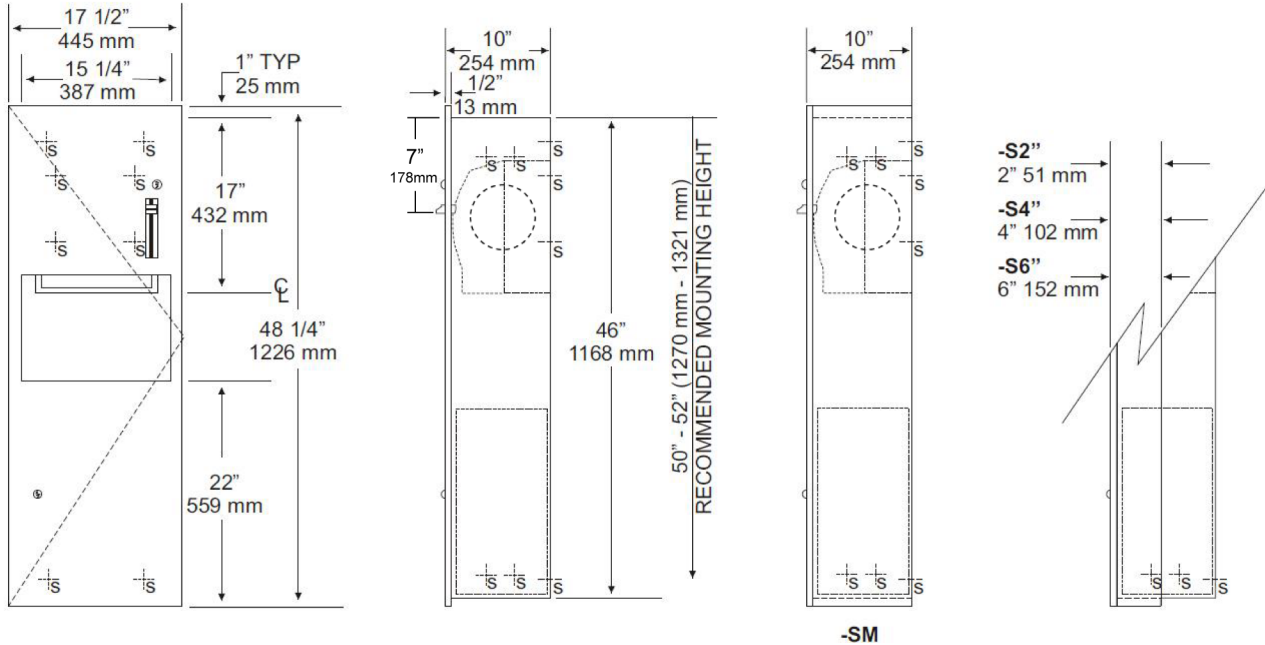

### SPECIFICATIONS      INSTALLATION

**Type 304 #22 ga stainless steel, #4 satin finish.**

**Flange:** Type 304 #22 ga stainless steel finished to match cabinet with 1/4" returns. (No miters or welds)

**Cabinet Back:** Type 304 stainless steel formed for rigidity with multiple welds to cabinet body.

**Unit-Door:** Type 304 #18 ga stainless steel with #4 satin finish, with full length door stop to reduce vandalism

**Towel Dispenser:** Roll towel mechanism is fabricated of #20 ga steel formed for rigidity. Unit will accommodate one 8" or 9" wide roll with a max O.D. of 7 7/8". Towel length dispensed has three adjustable settings. Lever is activated with one hand and less than 5 lbs of force to activate.

**Waste:** Removable steel waste with all leading edges hemmed. Unit is equipped with wire handle for easy handling.

**Hinge:** Full length, stainless steel piano type hinge.

**Locks:** Pin tumbler commercial quality lock.

**Collars:** Type 304 #22 ga stainless steel, finished to match cabinet. (Semi-recessed and surface mounted)

**U6474/199AW:** Rec Unit-Door Roll Towel Disp and Waste

**Overall Size:** 17 1/2"W x 48 1/4"H x 10 1/4"D

**445mm x 1226mm 260mm**

**Wall Opening:** 15 3/4"W x 46 1/2"H x 10"D

**400mm x 1181mm x 254mm**

**Capacity:** 10.5gallons (1.40 cu ft)

**\*Recommended 600ft roll for best results.**

**Coordinate installation with architect and contractor to avoid interference with pipes, vents, etc.. Provide a rough wall opening 15 3/4"W x 46 1/2"H. Required wall depth, will depend if full or semi-recessing is required. If collar is required, slide collar over the back before installing into wall. Remove waste from cabinet and mount unit plumb and true in opening with proper fasteners per application. Secure waste in cabinet and load paper towels. Controls and or mechanisms should operate with one hand and force required to activate controls shall be no greater than 5 lbs. (4.27.4)**

**Options :-VL1: Vinyl Liner (12 Gallon)**

**U6474/199AW-S2:** 2" Semi-Rec. collar, 8" w/o, 203 mm

**U6474/199AW-S4:** 4" Semi-Rec. collar, 6" w/o, 152 mm

**U6474/199AW-S6:** 6" Semi-Rec. collar, 4" w/o, 102 mm

**U6474/199AW-SM:** Full surface mounted collar.

**NOTES**