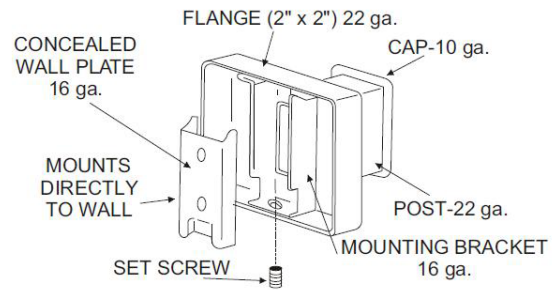# AJW
A&J Washroom Accessories

UX131, UX132
TOWEL BARS SQUARE OR ROUND

Job #:

Item #:

Quantity:

3 3/8"
86 mm

L

S

S

S

2"
51 MM

2"
51 MM

3/4" BAR
19 mm

FLANGE (2" x 2") 22 ga.

CONCEALED
WALL PLATE
16 ga.

CAP-10 ga.

MOUNTS
DIRECTLY
TO WALL

POST-22 ga.

SET SCREW

MOUNTING BRACKET
16 ga.
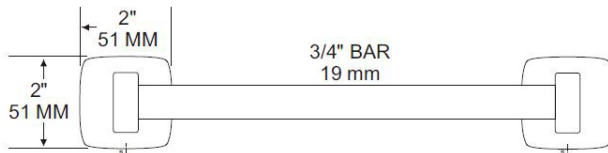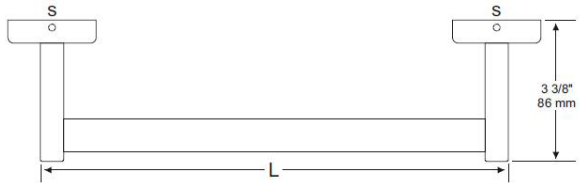
All UX bath accessories series are fabricated of type 304 stainless steel with a bright finish. Mounting plates are concealed with a snap-on type plate secured by a set screw.

Flange: 2" x 2" flange #22 ga stainless steel.

Post: #22 ga stainless steel.

Bar: #22 ga stainless steel, 3/4" dia

Mounting Plate: #16 ga concealed wall plate. Set screw secures mounting plate and flange.

UX131 : Square Towel Bar: 18", 24", 30", 36" (475mm, 610mm, 762mm, 914mm)

Overall Size: 2"H x 3 3/8"D (51mm x 86mm)

UX132 : Round Towel Bar: 18", 24", 30", 36" (475mm, 610mm, 762mm, 914mm

Overall Size: 2"H x 3 3/8"D (51mm x 86mm)

UX131-SF: Same as UX131 with Satin Finish

Provide an area on wall surface at desired or specified location. The centerline distance between the mounting plates is 1/2" less than the length of the towel bar. Place concealed mounting plate on wall surface and transfer mounting plate on wall surface and transfer mounting points. Drill pilot holes and secure with proper fasteners. Place snap-on flange over plate and secure with set screw. Repeat same step for second post. Place towel bar in post and place cover over plate to make sure spread is correct. Secure cover if bar fits.

NOTES