


JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER
----------	---------	------	------	-------

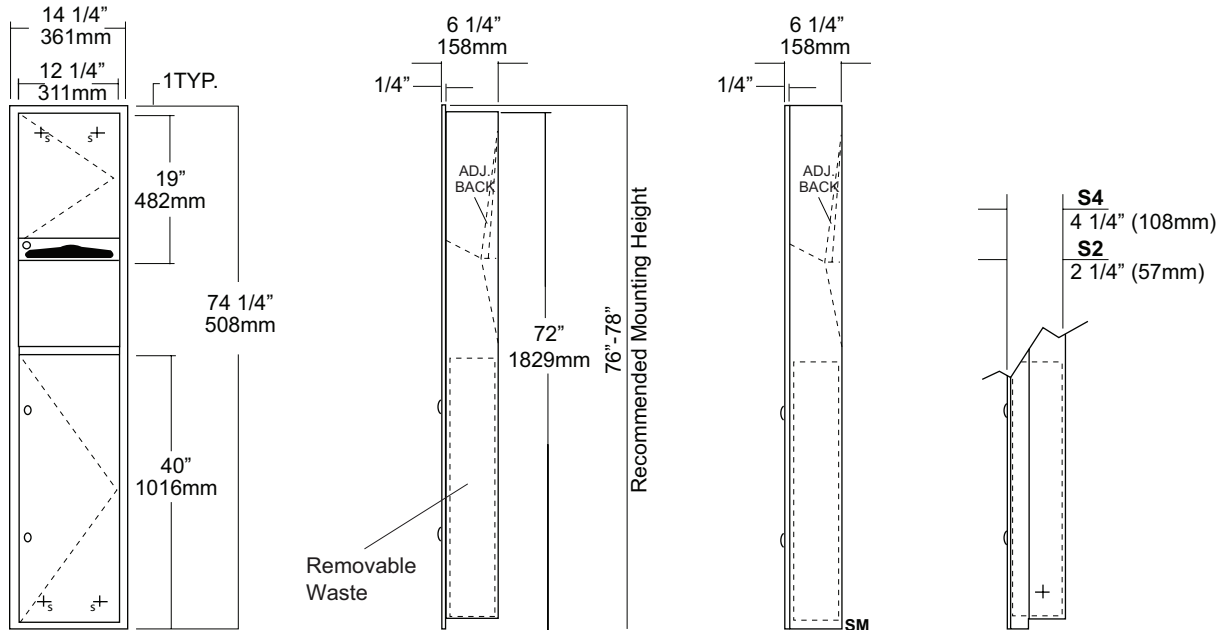

SPECIFICATIONS

Body: Fabricated of #22 ga stainless steel, #4 satin finish.

Flange: Fabricated of #22 ga stainless steel finished to match cabinet with 1/4" returns. (No miters or welds)

Cabinet Back: Fabricated of stainless steel formed for rigidity with multiple welds to cabinet body.

Cabinet Door: Fabricated of #22 ga stainless steel with #4 satin finish, with full length doorstop to reduce vandalism

Towel Dispenser: Dispensing area has hemmed edges to prevent injury and towel tearing. Adjustable back allows c-fold and single-fold towels to be dispensed.

Waste: Removable steel waste with all leading edges hemmed. Unit is equipped with handle for easy handling,

Hinge: Full length stainless steel piano type hinge.

Locks: Pin tumbler commercial quality lock.

Collars: Fabricated of #22 ga stainless steel, finished to match cabinet. (semi-recessed and surface mounted)

Overall Size: 14 1/4"W x 74"H x 6 1/4"D
362mm x 1842mm x 152mm

Wall Opening: 12 3/4"W x 72 1/2"H x 6"D
324mm x 1842mm x 152mm

U600-S2: semi-recessed with 2" collar 4" wall opening

U600-S4: semi-recessed with 4" collar 2" wall opening

U600-SM: Surface mounted with full skirt

Towel Capacity: 600 c-fold, 800 multifold or 1200 singlefold

Waste Capacity: 10.5 gallons (1.4 cu ft)

Options:

- P: Rigid plastic waste insert

INSTALLATION

Coordinate installation with architect and contractor to avoid interference with pipes, vents, etc. Provide a rough wall opening 12 3/4"W x 72 1/2"H. Required wall depth, will depend if full or semi-recessing is required. If collar is required, slide collar over the back before installing into wall. Remove waste from cabinet and mount unit plumb and true in opening with proper fasteners per application. Secure waste in cabinet and load paper lowers.

When cleaning cabinet, use a soft cloth, a non-abrasive or chloric solutions.

NOTES