



# U6184

Uni-Door Folded Towel & Waste  
Combination Unit


Revision 05/11

JOB #:

ITEM #:

QUANTITY:

MOUNTING	HANDING	TYPE	SIZE	OTHER

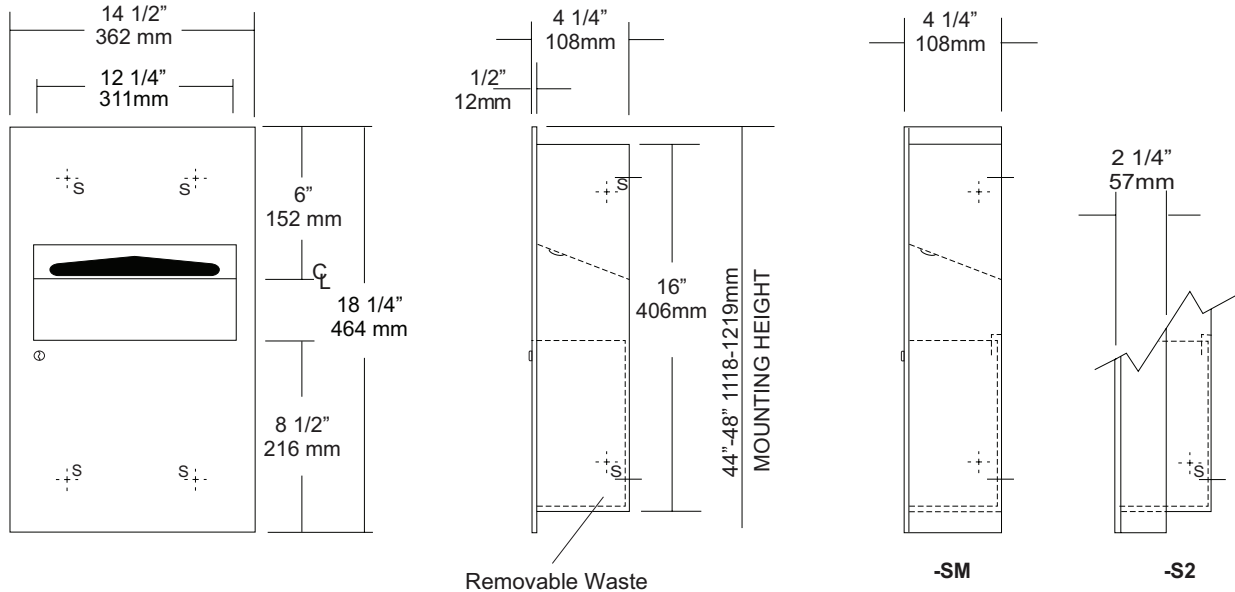

SPECIFICATIONS	INSTALLATION
----------------	--------------

**Body:** Fabricated of #22 ga stainless steel with a #4 satin finish.

**Flange:** Fabricated of #18 ga stainless steel with #4 satin finish and 1/4" returns to wall. (No miter or welds)

**Cabinet Back:** Fabricated of stainless steel formed for rigidity with multiple welds to cabinet body.

**Uni-Door:** Fabricated of #18 ga stainless steel with #4 satin finish with full length door stop to prevent vandalism

**Towel Dispenser:** Dispensing area has hemmed edges to prevent injury and towel tearing.

**Removable Waste:** Removable waste with hemmed edges.

**Hinges:** Heavy duty, full length, stainless steel piano type hinge.

**Lock:** Pin tumbler commercial quality keyed like all other AJW cabinets.

**Collars:** Fabricated of #22 ga #4 satin finish stainless steel finished to match cabinet body.

**Overall Size:** 14 1/2"W x 18 1/4"H x 4 1/4"D  
368mm x 463mm x 108mm

**Wall Opening:** 12 3/4"W x 16 1/2"H x 4"D  
324mm x 419mm x 102mm

**U6184-S2:** semi-recessed. with 2" collar. 2" wall opening (51mm)

**U6184-SM:** Surface mounted with full skirt.

**Towel Capacity:** 100 c-fold or 150 multifold

**Waste Capacity:** 1.5 gallons (.20 cu ft)

**Options:**

-VL3: Reusable vinyl liner

Coordinate installation with contractor and architect to avoid interference with pipes vents etc. Provide a rough wall opening 12 3/4"W x 16 1/2"H. Wall opening depth will depend on style mounting. Remove waste in install unit in opening. At this time if collars are required, install collars on units. Make sure cabinet will sit flush in wall and secure with proper fasteners per application. Install waste back into cabinet and load paper towels.

When cleaning cabinet, use a soft cloth, a non-abrasive or chloric solutions.

**NOTES**