


U651 TOWEL DISPENSER/ WASTE RECEPTACLE RECESSED

	Job #:
	Item #:
	Quantity:

MOUNTING	HANDING	TYPE	SIZE	OTHER

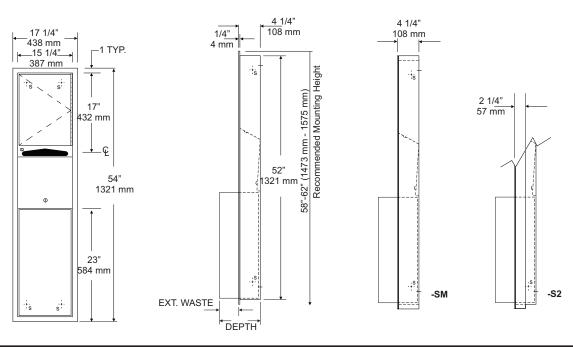

SPECIFICATIONS

Body: Type 304 #22 ga stainless steel, #4 satin finish.

Flange: Type 304 #22 ga stainless steel finished to match cabinet with 1/4" returns. (No miters or welds)

Cabinet Back: Type 304 stainless steel formed for rigidity with multiple welds to cabinet body.

Cabinet Door: Type 304 #22 ga stainless steel with #4 satin finish.

Towel Dispenser: Type 304 #22 ga stainless steel with hemmed edges to prevent injury and towel tearing.

Removable Waste: Type 304 #22 ga stainless steel #4 satin finish with all leading edges to have a radius. Unit is secured in place by a bottom bracket guide and top lock.

Hinge: Full length, heavy duty, stainless steel piano type hinge.

Locks: Pin tumbler commercial quality, keyed like all other A & J cabinets.

Collars: Type 304 #22 ga stainless steel, finished to match cabinet. (Used when full recessing cannot be accomplished)

Unit	Depth	Wst	Mntg	W/O	Capacity
U651	12"(305)	8"(203)	Rec	4"(101)	21 gal
U651-S2	12"(305)	8"(203)	S/R	2"(51)	21 gal
U651-SM	12"(305)	8"(203)	S/M	N/A	21 gal

Overall Size: 17 1/4"W x 54"H x 4 1/4"D (wall depth req)

438mm x 1372mm x 108mm Wall Opening: 15 3/4"W x 52 1/2"H

400mm x 1334mm

Capacity: Towels: 600C-Fold or 800 Multifold

INSTALLATION

Coordinate installation with architect and contractor to avoid interference with pipes, vents, etc.. Provide a rough wall opening 15 3/4"W x 52 1/2"H. See chart for required wall depth. If collar is required, slide collar over the back before installing into wall. Remove waste from cabinet and mount unit plumb and true in opening with proper fasteners per application. Secure waste in cabinet and load paper towels.

Options:

-C: Cup Dispenser

-CV: Covered Waste

-VL1: Vinyl Liner (13 gallon)
-VL2: Vinyl Liner (25 Gallon)

When cleaning cabinet use a non abrasive non-chloric solution and wiped off with the grain of the cabinet.

NOTES