

U865H

Waste Disposal & Toilet Tissue Dispenser Combination Unit


Revision 09/11

JOB	#:

ITEM #:

QUANTITY:

SIZE

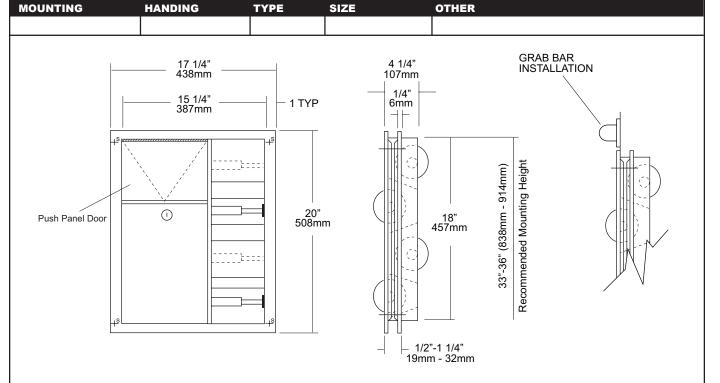

SPECIFICATIONS

Cabinet: Fabricated of #22 gauge stainless steel. All exposed surfaces have a #4 satin finish.

Flanges: Fabricated of #22 gauge stainless steel one-piece drawn seamless construction. No seams or exposed miters with 1/4" returns to wall surface. (Exposed mounting points) One flange is mounted flush to accommodate grab bar installation. Other flange is adjustable. (Grab bar is ordered separately.)

Toilet Tissue Dispenser: #22 gauge stainless steel hat adapters secure chrome plated, spring loaded rollers in place.

U007 Theft Resistant Adapter: Prevents spindle from being removed until roll has been depleted.

Hinges: All hinges are full length, heavy duty, stainless steel piano type hinges.

Overall Size: 17 1/4"W x 20"H x 4 1/4"D

438mm x 508mm x 108mm

Adjustable to fit partitions 1/2"- 1 1/4" thick.

Wall Opening: 15 3/4"W x 18 1/2"H

400mm x 470mm

Toilet Tissue: Four standard rolls with a 5 1/4" (133mm) OD.

INSTALLATION

Provide rough wall opening at desired or specified location of 15 3/4"W x 18 1/2"H. Place lower unit in opening to ensure proper fit. If unit fits properly in opening, secure side with the fixed flange at exposed mounting points. Secure adjustable flange last in the same manor. Secure with proper fasteners per each application. Fill toilet tissue

Toilet Paper Dispensers: All dispensers that are to meet ADA code cannot have any type of controlled delivery. (4.16)

NOTES